




Connect your device to Internet


1

Connect your device to the Internet using the provided Ethernet cable.

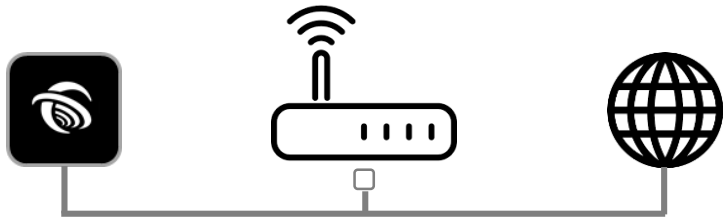

Download the MyEpitiro mobile app

2

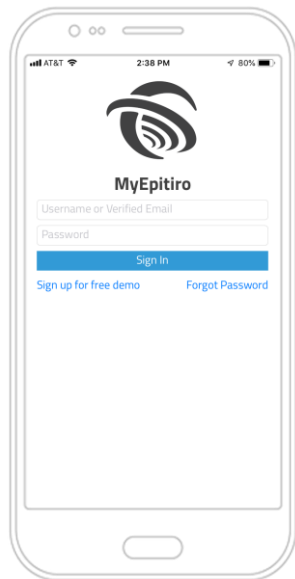

Sign-up at <http://my.Epitiro.com>. Log into your account to see your device **online**.



Add Wi-Fi Network Settings

3

Tap the information icon  of the device. Select **Modify Wi-Fi Settings**.

Enter:

1. Network SSID
2. Security Type / Encryption Method
3. Passphrase or Pre-share Key



Activate your device



4



myEPITIRO will now activate the device and update the device Wi-Fi configuration.

* This process may take a few minutes to complete.

How it Works

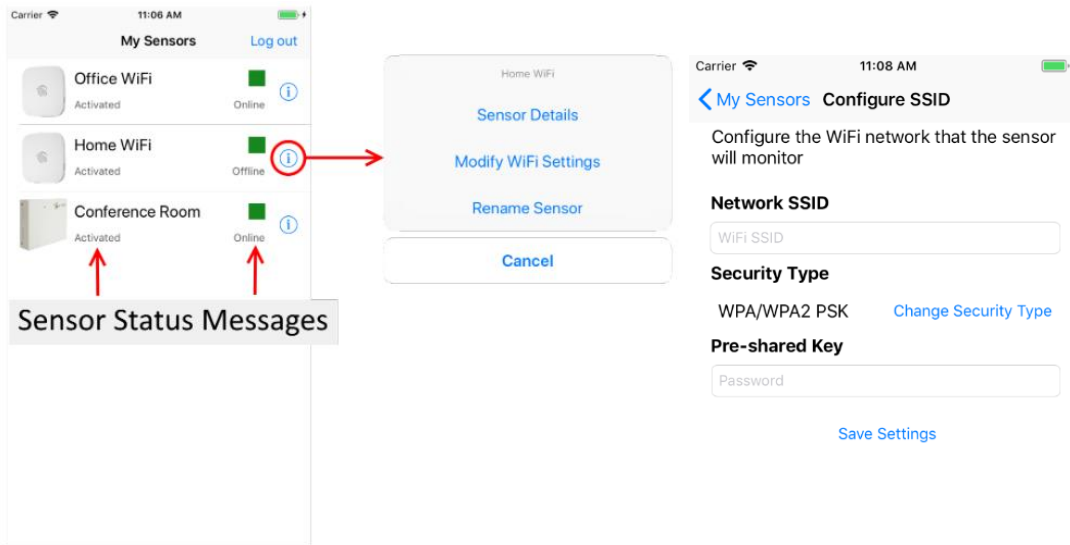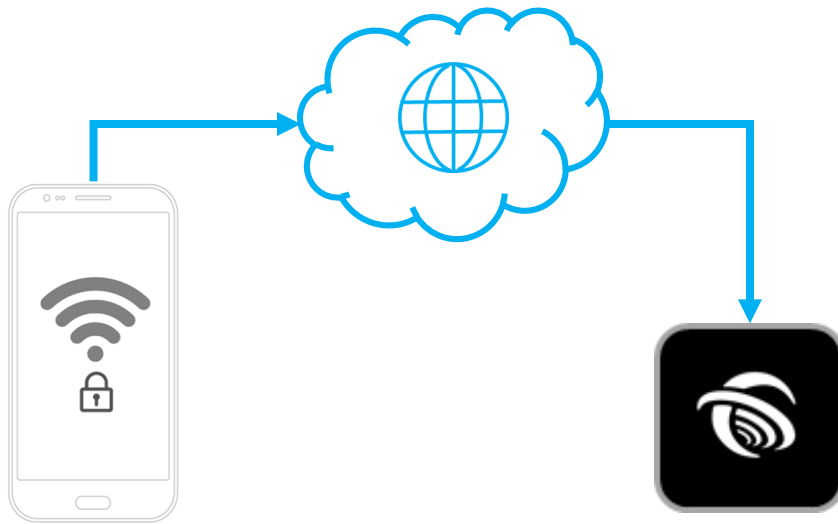

The Basics of How it Works

- The agent receives its SSID credentials from the mobile app through the internet.
- If a agent is connected to the internet, you can change its SSID credentials at any time.

Moving an agent that has already been activated – method 1


- Before unplugging the agent, give it the new WiFi credentials for the location you plan to move it to. [i](#)
- Select the [i](#) icon on the My agents list. Select the Modify WiFi Settings. Enter the new SSID credentials.
- Unplug the device and move it to the new location.

Moving a agent that has already been activated – method 2

- When you [i](#) arrive at the new location, provide the agent internet access through ethernet.
- Select the [i](#) icon on the My agents list. Select the Modify WiFi Settings. Enter the new SSID credentials.
- Unplug the device and move it to the new location.

Activating your agent


- 1 Connect agent to active ethernet port



- 2 Select agent (click on agent name)



- 4 agent will indicate Awaiting Activation

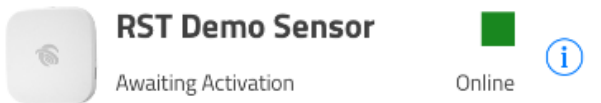

- 5 After a few minutes the agent will indicate Activated



- 3 Enter SSID credentials
Please be accurate
SSID credentials are case sensitive
Make sure that the agent is within range of the specified SSID

[My Sensors](#) Configure SSID

Configure the WiFi network that the sensor will monitor

Network SSID

Security Type

WPA/WPA2 PSK

[Change Security Type](#)


Pre-shared Key

[Save Settings](#)


- 6 You may now move the agent and install the agent in the desired location. Make sure to place the agent within range of the specified SSID. Performance data will appear within 1 hour of installation.

Changing the SSID credentials on an activated agent


- 1 Select agent Information (click on ⓘ of the desired agent)

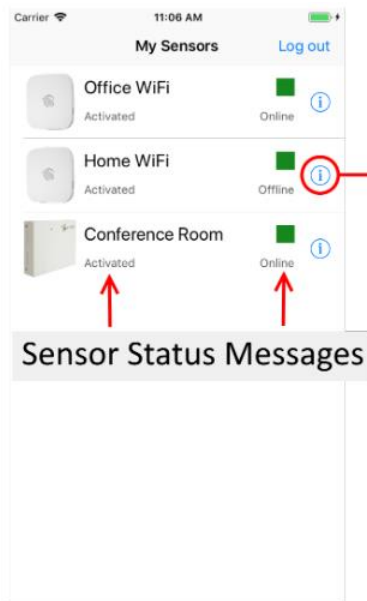

- 2 Select Modify WiFi Settings

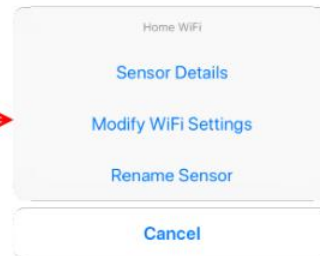


- 3 Enter SSID credentials
Please be accurate
SSID credentials are case sensitive
Make sure that the agent is within range of the specified SSID

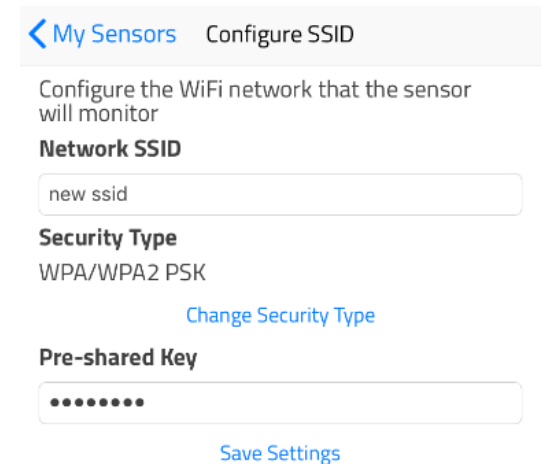


- 4 On the next test cycle, the agent will update its SSID credentials and begin testing the new SSID


- 5 You may now move the agent and install the agent in the desired location. Make sure to place the agent within range of the specified SSID. Performance data will appear within 1 hour of installation.

Moving an activated agent to a new location with a new SSID (method 1)


- 1 Select agent Information (click on  of the desired agent)

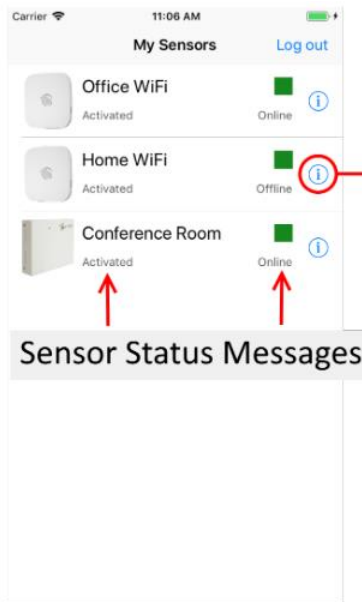

- 2 Select Modify WiFi Settings

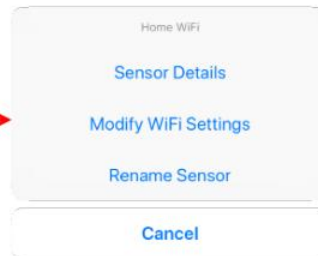

- 3 Enter SSID credentials
Please be accurate
SSID credentials are case sensitive
Make sure that the agent is within range of the specified SSID

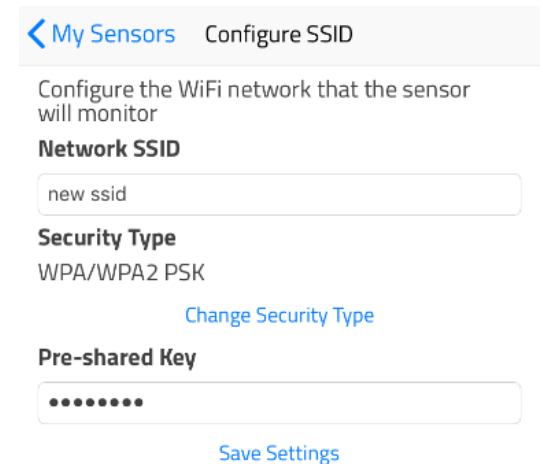

- 4 On the next test cycle, the agent will update its SSID credentials and go offline (Within approximately 30 minutes)




- 5 You may now move the agent and install the agent in the desired location. Make sure to place the agent within range of the new specified SSID. Performance data will appear within 1 hour of installation

Moving an activated agent to a new location with a new SSID (method 2)


- 1 At the new location, connect agent to active ethernet port




- 2 Select agent Information (click on  of the desired agent)

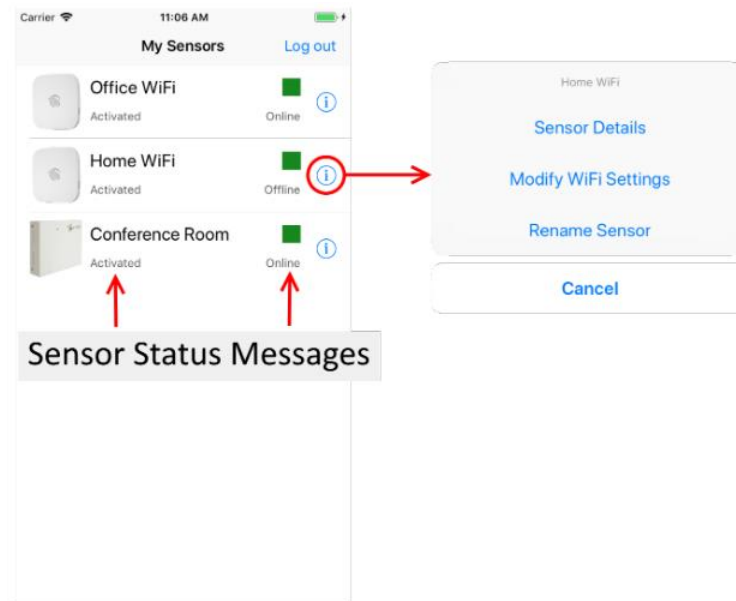

- 3 Enter SSID credentials
Please be accurate
SSID credentials are case sensitive
Make sure that the agent is within range of the specified SSID

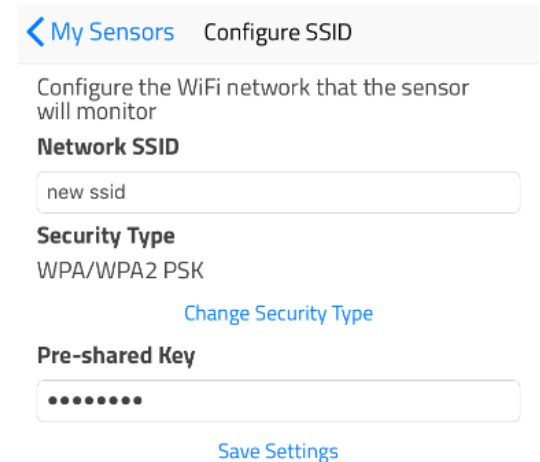

- 4 On the next test cycle, the agent will update its SSID credentials and go online (within approximately 30 minutes)

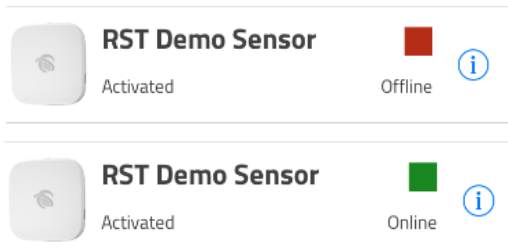

- 5 You may now move the agent and install the agent in the desired location. Make sure to place the agent within range of the specified SSID. Performance data will appear within 1 hour of installation.